


12 SS AUTO AUTOMATIC STRAPPING MACHINE

INTERMEDIATE

The Signode Predator 12 SS has been manufactured with safety in mind and to handle corrosive environments of the Food and Meat Processing Industries. Understanding the ever present demands in production, the Signode Predator 12 SS can apply up to 30 straps per minute. Any miss fed straps are easily and quickly corrected with the Signode Predator's automatic cut and refeed feature.



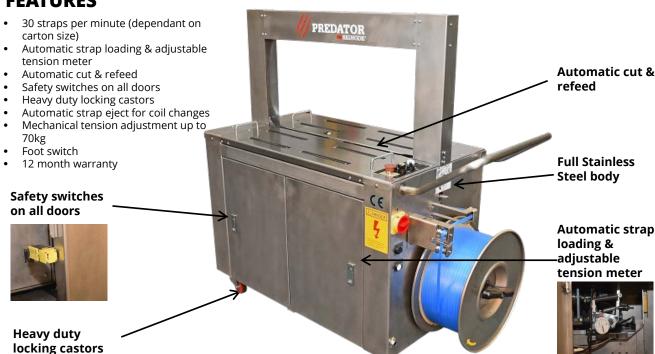





FEATURES & SPECIFICATIONS

SIGNODE PREDATOR 12MM STAINLESS STEEL AUTOMATIC	SPECIFICATIONS
Signode product code	T2915A
Arch size	850mm(Width) x 400mm(Height)
Strap size	PolyPro 12mm x 3,000mm premium grade
Machine finish	Full stainless steel (Type 304)
Power	240 volts 1 phase 50 Hz
Table height	810mm
Machine dimensions	1400mm(L) x 600(W) x 1320(H)mm
Tension range (Kgs)	Adjustable from 5-70Kgs
Max & min package size	Min 100mm(W) x 30mm(H); Max 800mm(W) x 400mm(H)
Strapping speed	30 straps per minute (by 50Hz) (Dependent on carton size)
Machine weight	260Kgs
Manual	Included
Machine brake mechanism	Electromagnetic brake/button release
Warranty	12 Months/Risk assessment supplied

THINK SAFETY. THINK SIGNODE


All Signode machines are manufactured with safety as a priority. Each Signode machine is tested & tagged, supplied with a risk assessment and complies with CE European manufacturing standards.


NATIONAL SERVICE & PARTS SUPPORT

Signode's national service team provides tailored preventative maintenance, genuine parts and onsite breakdown support.



DIMENSIONS







ASSOCIATED PRODUCTS



POLYPROPYLENE MACHINE GRADE STRAPPING

Available In: 9mm, 12mm, & 15mm



EQUIPMENT - AUTO RANGE

See our automatic strapping range
• PREDATOR 12: Semi_automatic

- PREDATOR 12: Semi automatic strapping machine (30 straps per min)
- Signode MOD GPX: Fully automatic strapping machine (65 straps per min)



PALLET WRAPPERS

Entry level powered pre-stretch & fully automatic options available

